


Priory Road

(opposite Tonbridge Station)



Female Facilities	4 female toilet cubicles, one large female baby change room with basin, two hand wash stations & janitor's storage room.	White tile and stainless steel.
Male Facilities	3 Male toilet cubicles, one open baby change shelf, two hand wash stations & janitor's storage room.	White tile and stainless steel.
Disabled Facilities	Yes, one unisex	RADAR system key
Size of Building	20 metres wide, 6 metres deep.	Frontage onto pavement of Priory Road at the junction with Quarry Road (B2260). Backing onto British Rail property.
Building Materials	Brick built with composite tile pitched roof.	
Entrances, Doors Windows	Three doors. Windows to the front with polycarbonate frosted panes.	
Exterior condition	Exterior in good overall condition, some paint peeling, and two windows boarded, no graffiti on exterior.	
Signage	The only noticeable signage seemed to be the 'MALE', 'FEMALE' and 'DISABLED' signs by the doors.	There are no street signs and the facility could be easily passed by without being identified as a public convenience.
Opening times	Open 24 HRS.	Doors are locked open on Male and Female toilet entrances
Next nearest PC	Angel Centre	7 mins on foot.

Nearest parking	Nearest parking 50 m	(2 hrs free)
Interior condition Female	All facilities are well lit and in reasonable repair, some graffiti in female baby change room. Hand washing stations had warm water.	
Interior condition Male	All facilities are well lit and in reasonable repair, Ceilings however in poor repair with paint peeling off. Hand washing stations had warm water.	
Interior condition Disabled	Hot tap in disabled toilet not working, only cold tap working.	
Drug paraphernalia?	No	
Lights working?	Yes	
Baby change?	Yes	
Hand-wash	Yes	
Odour	Not noticeable	
Mirror	Stainless steel very scratched	
Graffiti?	Some in Female toilet.	
Locks working?	Yes	
Cleaning	Twice Daily	

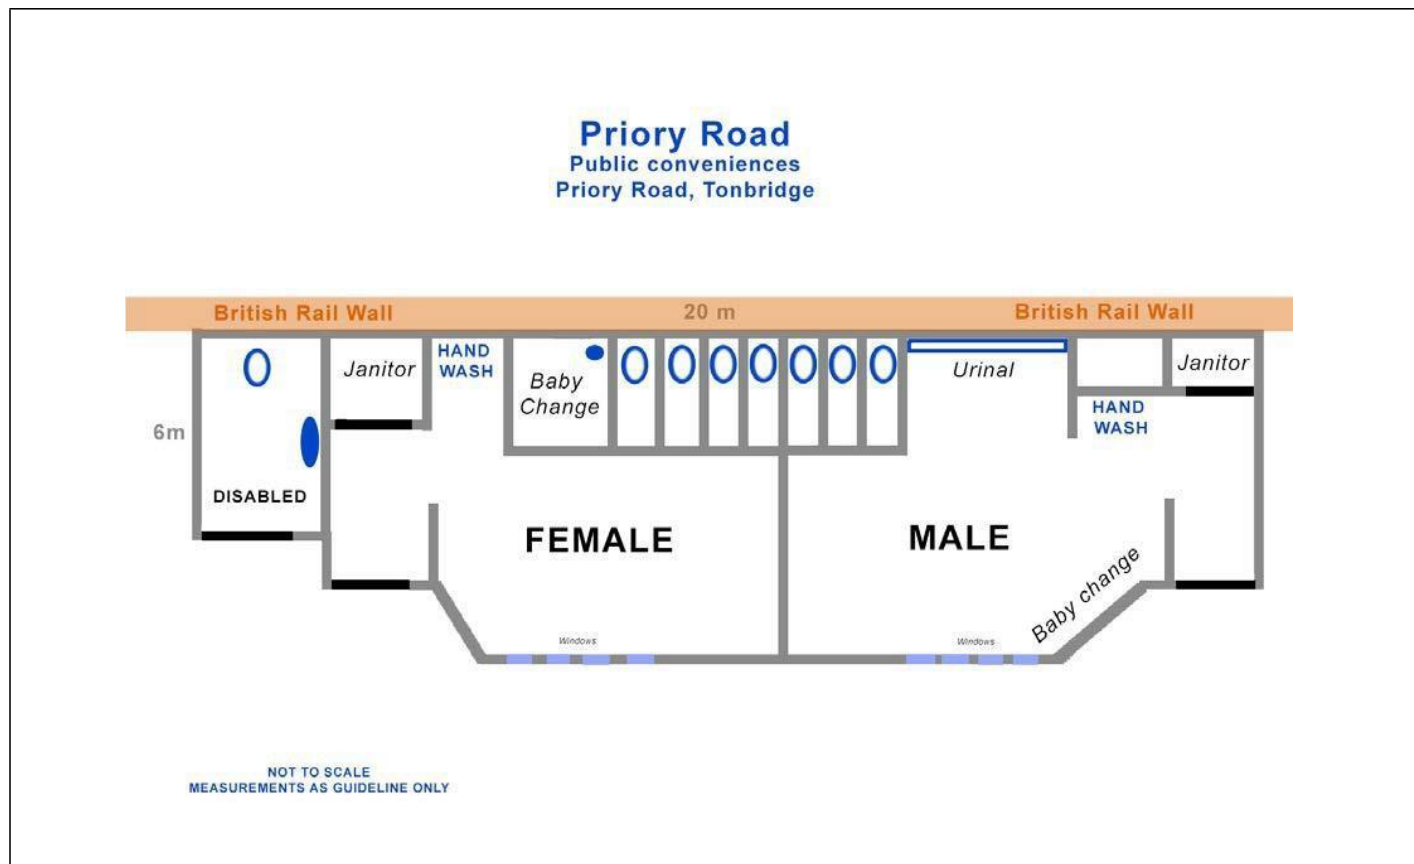

Potential alternative toilet facilities	
It was noted that although Lidl store is opposite the Priory Road toilets there are no customer toilets the store.	
Shell Garage, Quarry Hill Road	5 minutes on foot. One toilet with disabled access.
Tonbridge Station, Quarry Hill Road	1 minute on foot. Facilities are through the ticket barrier, so only viable as an alternative to train travellers
Saltwater fish restaurant, Barden Road	3 minutes on foot. M/F/D facilities, but accessed through dining area. Open 10am – 11pm
McDonalds, High Street	4 minutes on foot. M/F/D & baby change facilities, well maintained. Open 9 am – 11 pm Mon- Sun
Sainsbury, Angel Lane	7 minutes on foot. M/F/D & baby change facilities, good access Open 8am – 10pm Mon- Sat. 10am – 4pm Sunday
Café Nero, High Street	4 minutes on foot. M/F/D facilities, access in main café area. Open 7am – 6.30pm Mon- Sun
The Finch House, High Street	4 minutes on foot. M/F/D facilities, access through seating area. Open 8am – 6pm
Angel Centre, Angel Lane	7 minutes on foot. M/F/D & baby change facilities access through till gates Open 8am – 10pm Mon- Sat. 9am-10pm Sunday. Toilets in Changing rooms and on ground floor inner foyer area



Location: Priory Road, Tonbridge

Disabled Access: Access via Radar Key
Baby Changing: Facilities available



Female Toilets



Male toilets



Male Toilets



Male toilet baby change area.



Disabled toilet.


Angel Centre

Tonbridge



Female Facilities	3 female toilet cubicles, one open baby change shelf, one hand wash station.	Cream composite stone flooring tiles and stainless steel.
Male Facilities	3 Male toilet cubicles, 2.5 metre urinal trough, open baby change shelf, one hand wash stations.	Cream composite stone flooring tiles and stainless steel. Awkward passageway entrance.
Disabled Facilities	Yes, one unisex toilet with basin and air hand drier	RADAR system key. Cream composite stone flooring tiles and stainless steel.
Size of Building	Approx. 6.5 metres wide, 6.5 metres deep.	Triangulated space in Angel Centre building, under covered walkway.
Building Materials	Brick built exterior	
Entrances, Doors Windows	Three wooden doors arch unlocked sprung closed.	Disabled RADAR key
Exterior condition	Exterior in reasonable overall condition,	

Signage	Signage only on the doors which are blue in keeping with the other public toilets in the town.	Not obvious to visitors to Town
Opening times	Open 24 HRS.	Doors are unlocked but closed on Male and Female toilet entrances
Next nearest PC	Priory Road	12 mins on foot
Nearest parking	Nearest parking 5 m	Angel Centre Carpark £1.30 hr.
Interior condition Female	Slight odour, dirty ceiling light panels, hand-wash, soap & dryer working. Floor very grubby. Stainless steel mirror useable	
Interior condition Male	Some odour, floor very dirty, evidence of graffiti cleaned off stainless steel walls. Ceiling light panels dirty and dusty. Baby change shelf dirty. Mirror too scratched to be of use. Some broken tiles.	
Interior condition Disabled	Tile and white porcelain. Dirty floor, ceiling light panels clean and bright. Broken and missing tiling needing repair. Basin tap working (cold only) and hand-drier working.	
Drug paraphernalia?	No	
Lights working?	Yes, mostly, but some panels dirty	
Baby change?	Yes, stainless steel shelf open to view	
Hand-wash	Yes	
Odour	Yes in M and F	
Mirrors	Stainless steel a bit scratched.	Not of use in Male
Graffiti?	Cleaned but traces left	
Locks working?	Yes	
Cleaning	Once Daily	

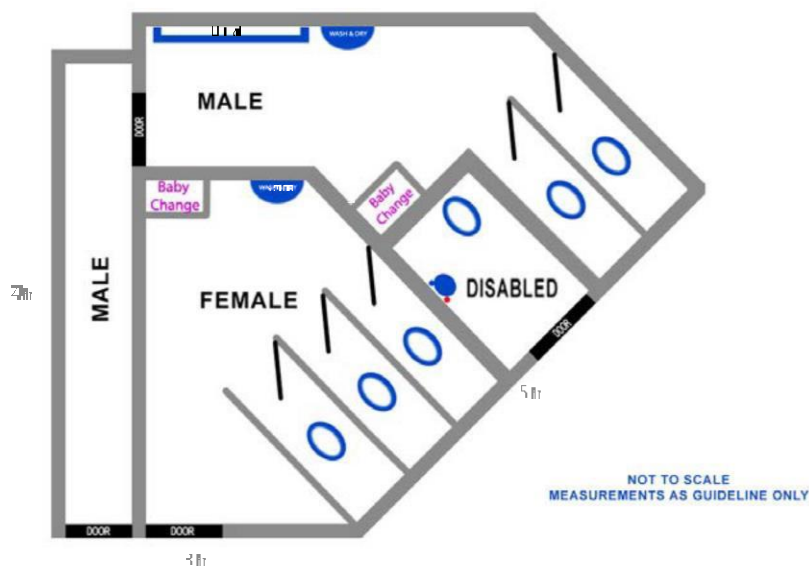

Potential alternative toilet facilities	
Angel Centre, Angel Lane	1 minute on foot. M/F/D & baby change facilities access through till gates Open 8am – 10pm Mon- Sat. 9am-10pm Sunday. Toilets in Changing rooms and on ground floor inner foyer area
Sainsbury, Angel Lane	2 minutes on foot. M/F/D & baby change facilities, good access Open 8am – 10pm Mon- Sat. 10am – 4pm Sunday
The Finch House, High Street	4 minutes on foot. M/F/D facilities, access through seating area. Open 8am – 6pm
Café Nero, High Street	5 minutes on foot. M/F/D facilities, access in main café area. Open 7am – 6.30pm Mon- Sun
Starbucks, Tonbridge High St.	5 minutes on foot. M & F shared Disabled & baby change facilities, good access Open 8am – 10pm Mon- Sat. 10am – 4pm Sunday
Greggs High Street	5 minutes on foot. Male & Female shared, (small access). Disabled facilities, access through main café area. Open 6.30am – 6.00pm Mon- Sun
Wetherspoon Public House High Street	6 minutes on foot. Male, Female, Disabled & Baby-change, access through seating area. Open 8am – 11pm, (8pm curfew for under 16.)
McDonalds, High Street	5 minutes on foot. M/F/D & baby change facilities, well maintained. Open 9 am – 11 pm Mon- Sun



Location: Angel Centre Public Tonbridge
Disabled Access: Access via Radar Key
Baby Changing: Facilities available



Female Toilets



Female Toilets



Male toilets



Disabled toilet showing missing tiles



Female toilet showing damaged seat


Haysden Country Park

(car park)



Female Facilities	2 female toilet cubicles, 2 basins. Drinking water tap, heater on wall, hot air hand dryer	Blue tile and painted walls
Male Facilities	1 Male toilet cubicles , two urinals. 2 basins. Drinking water tap, heater on wall, hot air hand dryer (new)	Blue tile and painted walls
Disabled Facilities	Yes, one unisex, including baby change, one basin and hot air hand dryer	RADAR system key, also available from café when open. Well heated room.
Size of Building	10 metres wide, 3.6 metres deep.	
Building Materials	Timber clad breeze block, moss covered felt roof. Blends well with Country Park setting. Building shared with Park Rangers facilities at rear	
Entrances, Doors Windows	Three doors. Windows to the front and side (female) with polycarbonate roof light domes	
Exterior condition	Exterior in good overall condition, although very muddy.	
Signage	The only signage was the 'MALE', 'FEMALE' and 'DISABLED' signs on doors, but building easy to identify as a Public Toilet as the only building in the area	
Opening times	Open during Country Park opening times	
Next nearest PC	Priory Road or Tonbridge Racecourse	10 mins by car

Nearest parking	Nearest parking 10 m	(4 hrs £1.00 fee)
Interior condition Female	All facilities are well lit and in reasonable repair. Hand washing stations had warm water.	
Interior condition Male	All facilities are well lit and in reasonable repair. Hand washing stations had warm water.	
Interior condition Disabled	All facilities are well lit and in reasonable repair. Hand washing stations had warm water. Baby change all in good condition and well heated.	
Drug paraphernalia?	No	
Lights working?	Yes	
Baby change?	Yes	In Disabled Toilet and only access with key
Hand-wash	Yes	
Odour	None noticeable	
Mirror	No	
Graffiti?	None	
Locks working?	Yes	
Cleaning	Once Daily	

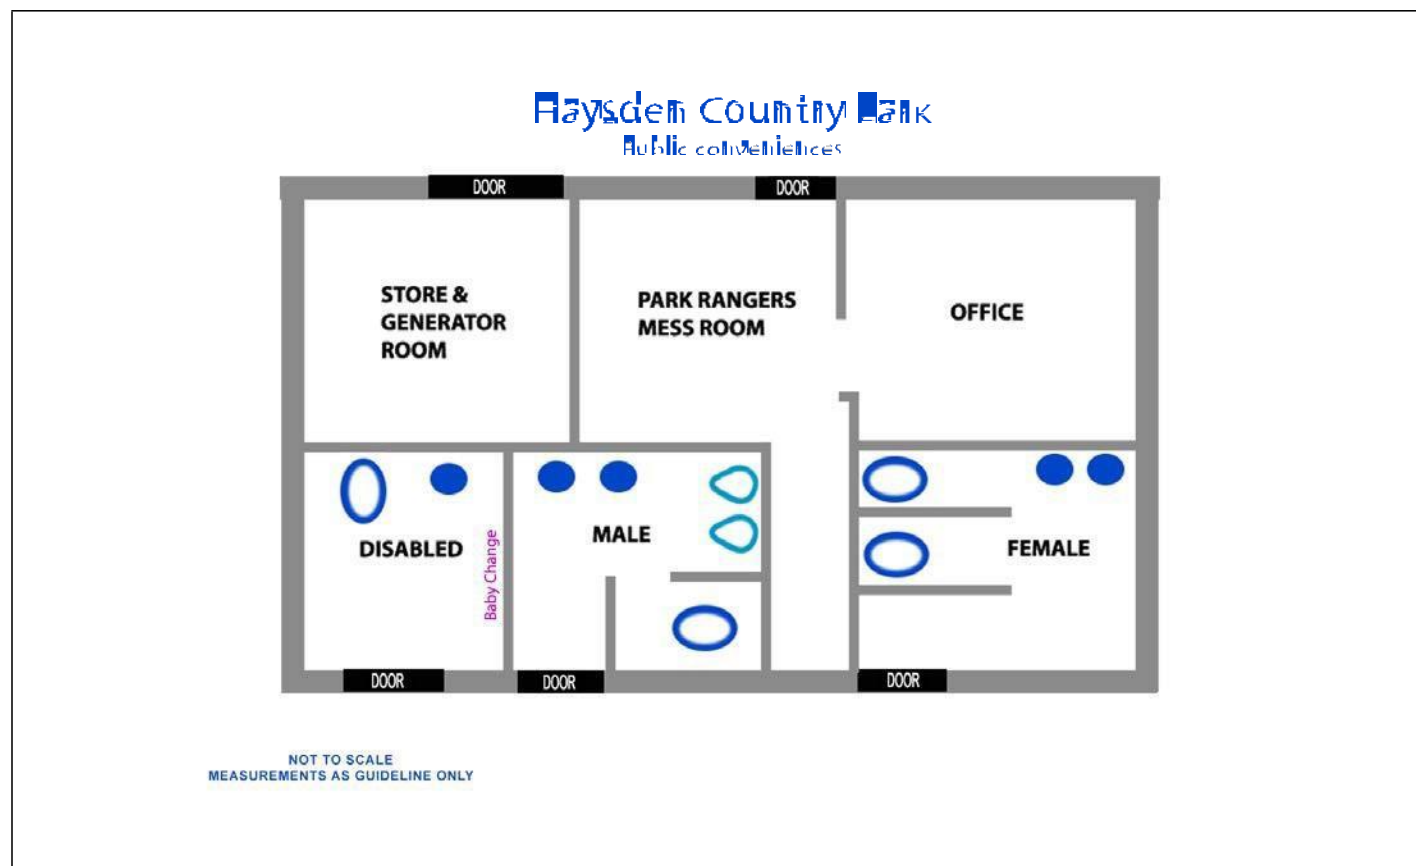

Potential alternative toilet facilities	
There are no viable alternative facilities within 30 minutes by foot	
Shell Garage, Quarry Hill Road	10 minutes drive One toilet with disabled access.



Location: Heysden Country Park off Lower Heysden Lane Torbridge

Disabled Access: Access via Radar Key
 Baby Changing: No facilities available



Female Toilets



Male toilets



Female Toilets



Male toilets



Disabled toilet.

Racecourse Sports Ground

Tonbridge




Female Facilities	5 female toilet cubicles, one open baby change shelf, two hand wash stations.	Red tile floor and stainless steel.
Male Facilities	2 Male toilet cubicles, 3 metre urinal trough, one open baby change shelf, two hand wash stations.	Red tile floor and stainless steel.
Disabled Facilities	Yes, one unisex	RADAR system key. Red tile floor and stainless steel.
Size of Building	15.5 metres wide, 5.5 metres deep.	Well placed at 4-way junction in North East corner of park
Building Materials	Brick built with red tile pitched roof. A very utilitarian building, that was clearly built to withstand vandalism, but not pleasant to use especially for children and parents using the playground.	
Entrances, Doors Windows	Three Stainless steel doors. One janitors door, no windows.	M&F doors locked open Disabled RADAR key
Exterior condition	Exterior in reasonable overall condition, minor graffiti on exterior.	

Signage	Large 'MALE', 'FEMALE' and 'DISABLED' signs above the doors, looked to be lit at night, but not confirmed	Signage at each end of the building. And around the paths and walkways, including the newly appointed riverside walk.
Opening times	Open 24 HRS.	Doors are locked open on Male and Female toilet entrances
Next nearest PC	Castle Street Priory Road	10 mins on foot (uphill) 20 mins on foot
Nearest parking	Nearest parking 50 m	Lower castle field car park £1.30 hr.
Interior condition Female	All facilities are very utilitarian, lighting is from florescent lights above diffused panels which are dirty. Hand washing stations vandalised and not working	
Interior condition Male	All facilities are very utilitarian, lighting is from florescent lights above diffused panels which are dirty and some not working. No paper on one toilet. Hand washing stations not working - soap only on one	
Interior condition Disabled	Clean, odour free, well lit.	
Drug paraphernalia?	No	
Lights working?	Yes, mostly, but panels dirty	
Baby change?	Yes, stainless steel shelf open to view	
Hand-wash	Yes, none working in M&F	
Odour	Some in male toilet	
Mirrors	Stainless steel very scratched	
Graffiti?	Minor on exterior.	
Locks working?	Yes	
Cleaning	Twice Daily	

Racecourse Sports Ground

Public conveniences

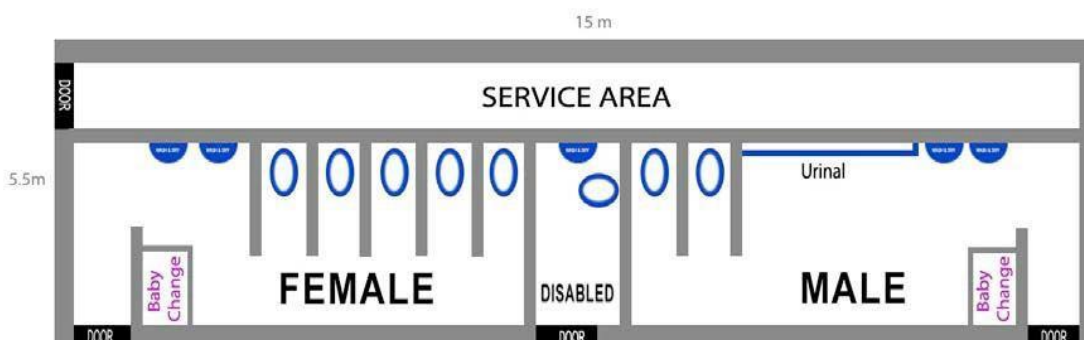

NOT TO SCALE
MEASUREMENTS AS GUIDELINE ONLY

Potential alternative toilet facilities	
Tonbridge Swimming pool	2 minutes on foot. Male and Female toilets just inside main entrance, signed as public toilets, Disabled toilet access through till gate (with baby change) Open 6am-10pm Mon-Fri. 10am-8pm Sat-Sun
Tonbridge Castle	8 minutes on foot. Male, Female, Disabled. 8.30am-5.00pm Mon-Fri. 9am-5pm Saturday 10.30am-4.30pm Sunday.
Castle Street public toilet	10 minutes on foot. 24 hrs
Old Fire Station Café, Castle Street	10 minutes on foot. Male, Female, Disabled & Baby-change. Limited size, access through main café seating area. 8.30am-4.00pm Mon- Sat. 9.30am-4.00pm Sunday. Also, Thus. Fri. & Sat 6pm-11pm
Tonbridge Judians RFC, Lower Castle Field car park.	3 minutes on foot. M/F/D facilities, but limited opening times
Tonbridge Junior Football Club, middle of Sportsground	4 minutes on foot. M/F/D facilities, but limited opening times
Starbucks, Tonbridge High St.	7 minutes on foot. M & F shared Disabled & baby change facilities, good access Open 8am – 10pm Mon- Sat. 10am – 4pm Sunday
Greggs High Street	7minutes on foot. Male & Female shared, (small access). Disabled facilities, access through main café area. Open 6.30am – 6.00pm Mon- Sun
Wetherspoon Public House High Street	8 minutes on foot. Male, Female, Disabled & Baby-change, access through seating area. Open 8am – 11pm, (8pm curfew for under 16.)



Location: Race Course Sports Ground Tonbridge

Disabled Access: Access via Radar Key
Baby Changing: Facilities available



Female Toilets



Male toilets



Male Toilets




Male toilet showing baby change area.



Disabled toilet.


Castle Street

Tonbridge

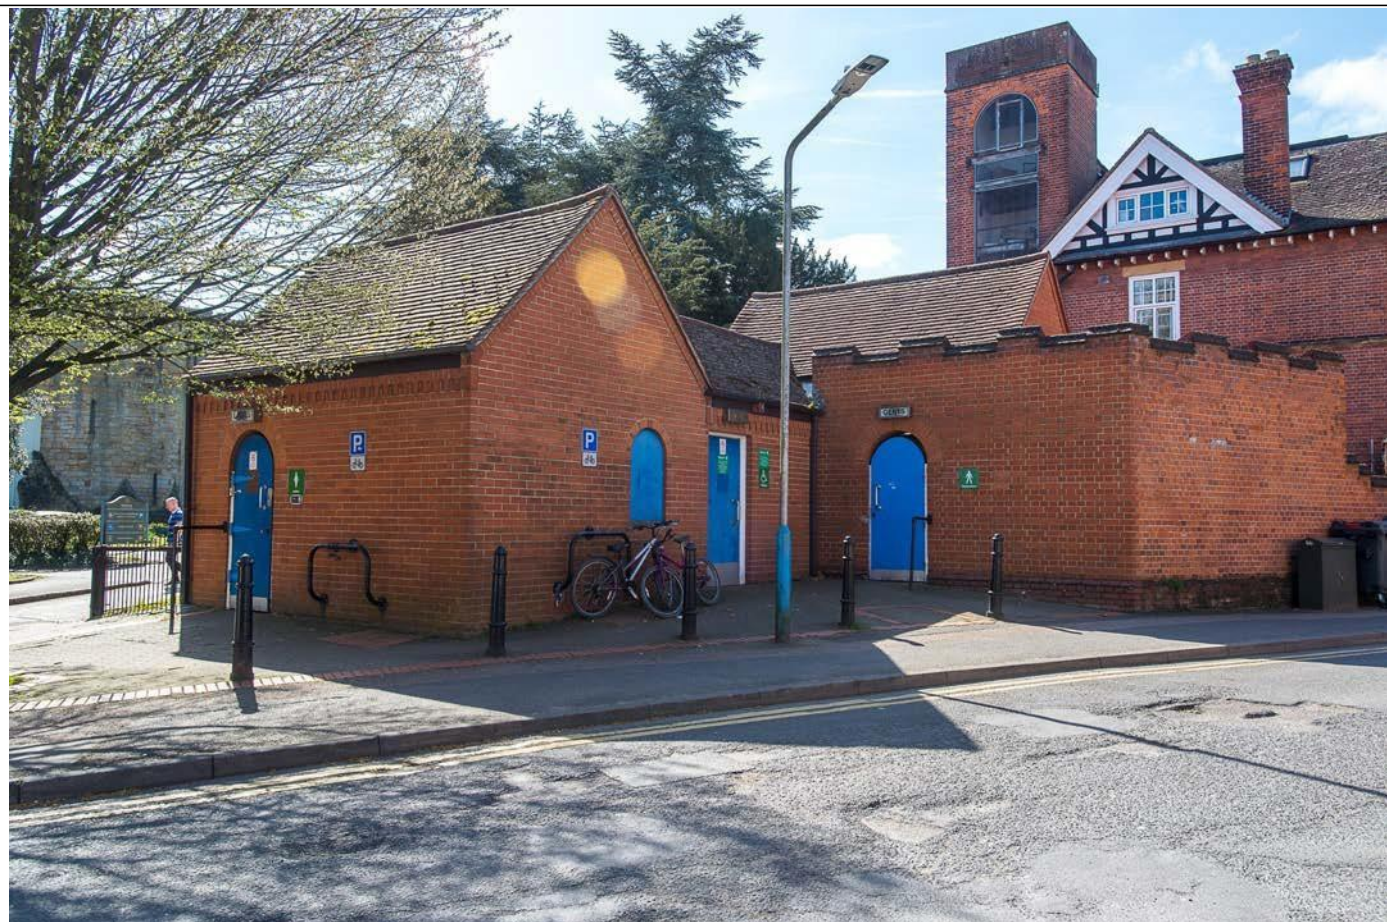

Female Facilities	3 female toilet cubicles, one open baby change shelf, one hand wash station.	Cream tile floor and stainless steel.
Male Facilities	3 Male toilet cubicles, 2.5 metre urinal trough, open baby change shelf, one hand wash stations.	Cream tile floor and stainless steel.
Disabled Facilities	Yes, one unisex toilet with basin and air hand drier	RADAR system key. Cream tile floor and stainless steel.
Size of Building	Approx. 11 metres wide, 5.5 metres deep.	
Building Materials	Brick built with red tile pitched roof. In keeping with surrounding architecture.	
Entrances, Doors Windows	Three wooden doors fitting to doorway arch unlocked but sprung closed.	Disabled RADAR key Female door has some rough repair work on hinges visible on outside.
Exterior condition	Exterior in reasonable overall condition, as said in keeping with surrounding area.	

Signage	Signage on building, but not very obvious, Some signage at the Castle for the toilets	
Opening times	Open 24 HRS.	Doors are unlocked on Male and Female toilet entrances
Next nearest PC	Racecourse Sports ground	10 mins on foot
Nearest parking	Nearest parking 50 m	Castle car park £1.30 hr.
Interior condition Female	Clean, no odour, well lit, but some light panels need cleaning. Utilitarian stainless steel interior	
Interior condition Male	Some odour floor very dirty, toilet seats broken in two of three toilets no soap in handwash	
Interior condition Disabled	One skylight, interior a bit grubby and janitor's door lock vandalised	
Drug paraphernalia?	No	
Lights working?	Yes, mostly, but panels dirty	
Baby change?	Yes, stainless steel shelf open to view	
Hand-wash	Yes, but no soap in male toilet	
Odour	Some in male toilet	
Mirrors	Stainless steel a bit scratched, just useable	
Graffiti?	no	
Locks working?	Yes	
Cleaning	Twice Daily	

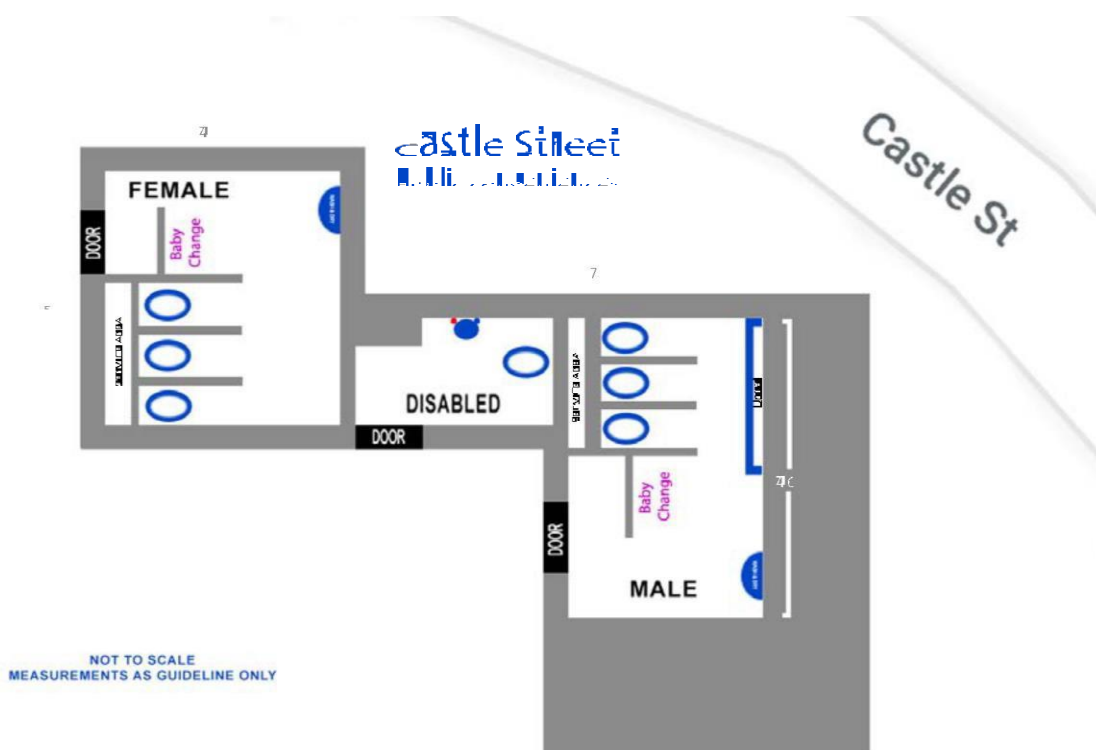

Potential alternative toilet facilities	
Old Fire Station Café, Castle Street	1minute on foot. Male, Female, Disabled & Baby-change. Limited size, access through main café seating area. 8.30am-4.00pm Mon- Sat. 9.30am-4.00pm Sunday. Also, Thus. Fri. & Sat 6pm-11pm
Tonbridge Castle	2 minutes on foot. Male, Female, Disabled. 8.30am-5.00pm Mon-Fri. 9am-5.pm Saturday 10.30am-4.30pm Sunday.
Tonbridge Swimming pool	5 minutes on foot. Male and Female toilets just inside main entrance, signed as public toilets, Disabled toilet access through till gate (with baby change) Open 6am-10pm Mon-Fri. 10am-8pm Sat-Sun
Tonbridge Judians RFC, Lower Castle Field car park.	5 minutes on foot. M/F/D facilities, but limited opening times
Starbucks, Tonbridge High St.	7 minutes on foot. M & F shared Disabled & baby change facilities, good access Open 8am – 10pm Mon- Sat. 10am – 4pm Sunday
Greggs High Street	8minutes on foot. Male & Female shared, (small access). Disabled facilities, access through main café area. Open 6.30am – 6.00pm Mon- Sun
Wetherspoon Public House High Street	6minutes on foot. Male, Female, Disabled & Baby-change, access through seating area. Open 8am – 11pm, (8pm curfew for under 16.)
St Peter & St Paul Church Church Lane	4 minutes on foot. Male, Female & Disabled good access, just inside foyer. 9am – 4pm Monday – Saturday. 8am - 8pm Sunday
Rose & Crown public house High Street, Tonbridge	2 minutes on foot. Male, Female, Disabled & Baby-change, but disabled access through gated side entrance as main door not suitable. Open 8am-11pm. But access through bar and public hotel areas when side gate closed.
Chequers public house High Street, Tonbridge	2 minutes on foot. Male, Female, Disabled & Baby-change, but not suitable for easy disabled access.



Location: Castle Street Torridge

Disabled Access: Access via Radar Key
Baby Changing: Facilities available



Female Toilets



Male toilets



Female toilet door



Female toilet showing handwash area.



Disabled toilet

Tonbridge Cemetery

Welland Road




Female Facilities	One shared Male / Female toilet with fold down baby change shelf	Red tile floor with stainless steel walls and fittings
Male Facilities	One shared Male / Female toilet with fold down baby change shelf	Red tile floor with stainless steel walls and fittings
Disabled Facilities	Yes, one unisex toilet with hand-wash/soap/air-dry unit and flod down baby change shelf	RADAR system key. Red tile floor with stainless steel walls and fittings
Size of Building	Approx. 6.7 metres wide, 2.4 metres deep.	Located inside Cemetery grounds
Building Materials	Brick built exterior, flat roof	
Entrances, Doors Windows	Two stainless steel doors and two service doors. Wheelchair access to all facilities	Disabled RADAR key
Exterior condition	Exterior in reasonable overall condition,	

Signage	Small signs on the doors	Looks like they are not public conveniences, but part of the cemetery
Opening times	Only when there is a service or on request from Cemetery staff	Doors are otherwise locked, including the disabled toilet which when unlocked also has RADAR key entry
Next nearest PC	Castle Street	20 mins on foot
Nearest parking	Nearest parking 5 m	Outside gates on Welland Road. Free
Interior condition Female	Some odour, bin full, toilet seat missing. Hand-wash working. Generally clean otherwise	
Interior condition Male	As above	
Interior condition Disabled	Generally clean and in good condition. Hand-wash working.	
Drug paraphernalia?	No	
Lights working?	Yes	
Baby change?	Yes	
Hand-wash	Yes	
Odour	Slight, in M and F	
Mirrors	Stainless steel good condition	
Graffiti?	Cleaned but traces left	
Locks working?	Yes	
Cleaning	Not ascertained	


T. Bridge Cemetery

Public conveniences

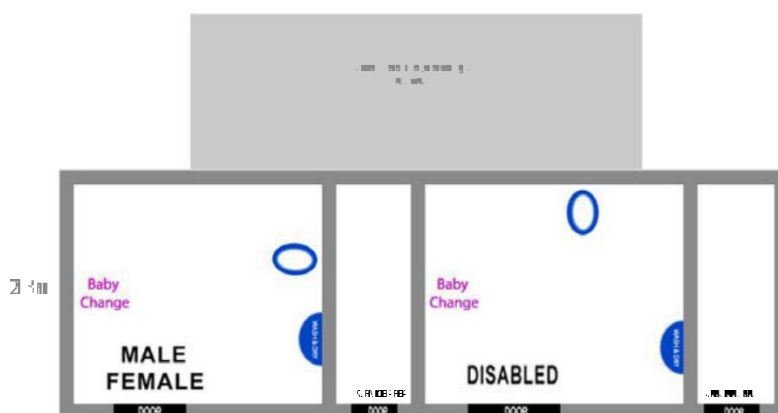



Tonbridge Cemetary Public Toilets

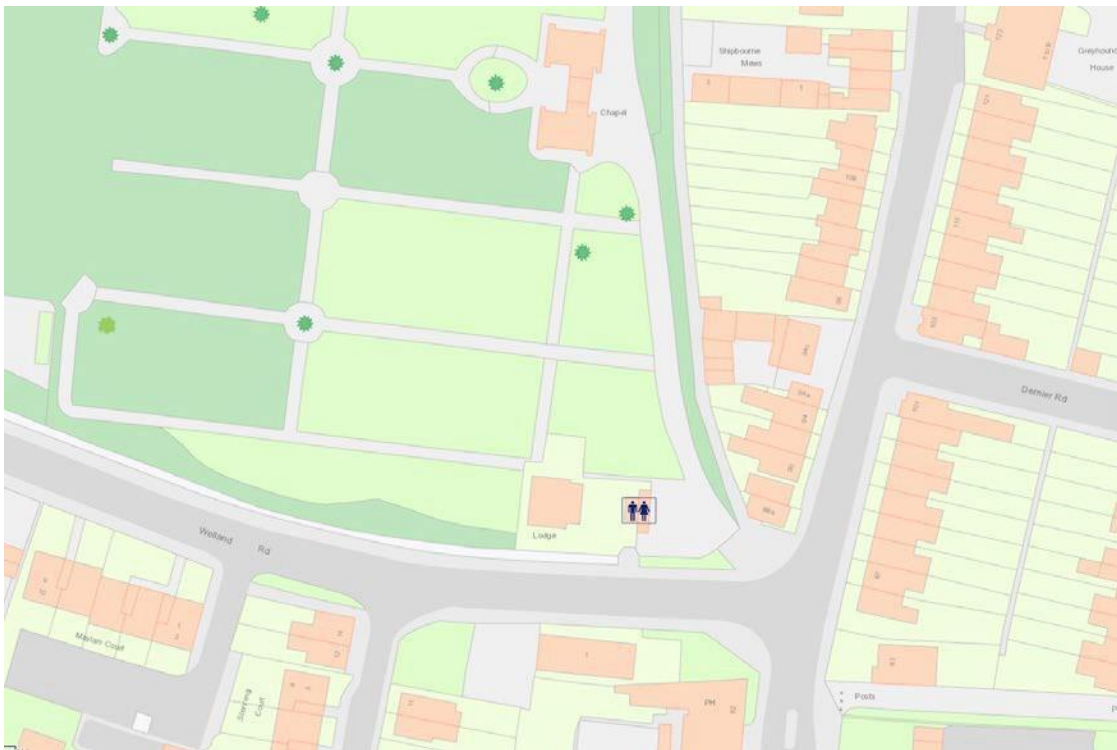



Male / Female Toilets



Disabled toilet



Male / Female Toilets



Disabled toilet



Male / Female Toilets

Wrotham


High Street.



Female Facilities	Two toilets, one basin (no soap or hand dry). one Baby-change shelf	Red tile floor with stainless steel walls and fittings
Male Facilities	One toilet, one urinal trough, one basin, one Baby-change shelf	Red tile floor with stainless steel walls and fittings
Disabled Facilities	One unisex toilet with one basin (no soap or hand dry paper). Heater bar (not tested),	RADAR system key. Red tile floor with painted walls and porcelain fittings
Size of Building	6.5 metres wide, 3.5 metres deep.	
Building Materials	Brick and painted render exterior, red tiled roof, skylight roof windows	
Entrances, Doors Windows	Three blue wooden doors. Wheelchair access to all facilities	Disabled RADAR key M & F doors unlocked closed
Exterior condition	Exterior in reasonable condition. Exterior lights lit during the day.	

Signage	Small green signs on the walls next to the doors.	No signage noticed in village
Opening times	24 HR	Doors are locked open except disabled toilet which has RADAR key entry
Next nearest PC	Borough Green	M,F & D facilities. 15 min Drive.
Nearest parking	Directly outside - free	
Interior condition Female	Fluorescent and natural light panels dirty and overgrown with adjacent vines. Hand-wash, no soap or air-dry. No odour.	
Interior condition Male	Wet and damaged floor, stainless steel walls have some damage. Strong odour. Ceiling dirty as in Female toilet	
Interior condition Disabled	Fluorescent and natural light panels dirty, all a bit grubby generally.	
Drug paraphernalia?	No	
Lights working?	Yes, but dirty panels	
Baby change?	yes	
Hand-wash	Yes, water only.	
Odour	Yes, in Male	
Mirrors	No	
Graffiti?	No	
Locks working?	Yes but one not in the Female.	
Cleaning	Once daily	

Wrotham Public conveniences

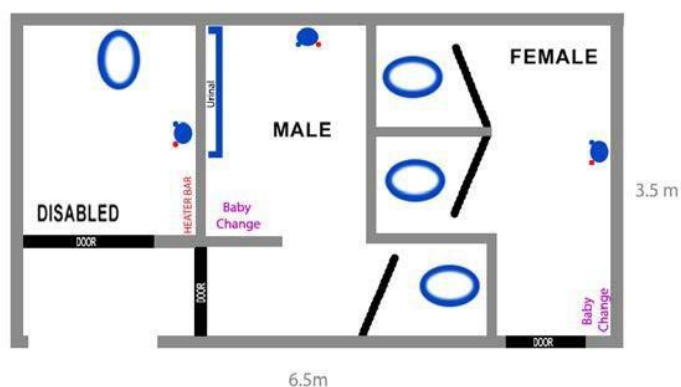

NOT TO SCALE
MEASUREMENTS AS GUIDELINE ONLY



Signage on Wrotham Public Toilets



Location: High Street Wrotham
Disabled Access: Access via Radar Key
Baby Changing: No facilities available



Male Toilets



Male Toilets



Female Toilets



Disabled entrance



Disabled toilet



Roof light panels Wrotham Toilets


Hadlow

Court Lane and Tonbridge Road junction



Female Facilities	Two toilets, one handwash/soap/dry unit. One Baby-change shelf	Red tile floor with stainless steel walls and fittings
Male Facilities	One toilet, one urinal trough, one handwash/soap/dry unit. One Baby-change shelf	Red tile floor with stainless steel walls and fittings
Disabled Facilities	Yes, one unisex toilet with Basin & air-dry unit	RADAR system key. Red tile floor with stainless steel walls and fittings
Size of Building		
Building Materials	Brick built exterior, tiled roof	
Entrances, Doors Windows	Three stainless steel doors. Wheelchair access to all facilities. Windows sealed off	Disabled RADAR key M & F doors locked open
Exterior condition	Exterior in good overall condition, tree and planting outside on corner plot, moss covered roof	

Signage	Small green signs on the walls and also lit signs next to the doors	
Opening times	24 HR	Doors are locked open except disabled toilet which has RADAR key entry
Next nearest PC	Tonbridge Town	
Nearest parking	On High street 10m - Free	
Interior condition Female	Fluorescent Light panels dirty. Hand-wash, Soap and air-dry working	
Interior condition Male	Not all lights working. Some odour. Toilet seat damaged (burnt). Generally, not very clean. Hand-wash, Soap and air-dry working	
Interior condition Disabled	Hand-wash, Soap and air-dry working. Fluorescent Light panels dirty. But clean and odour free, mirror unscratched.	
Drug paraphernalia?	No	
Lights working?	Yes, but dirty panels	
Baby change?	Yes M & F	
Hand-wash	Yes	
Odour	Slight in male only	
Mirrors	Stainless steel, useable	
Graffiti?	No	
Locks working?	Yes	
Cleaning	Once daily	

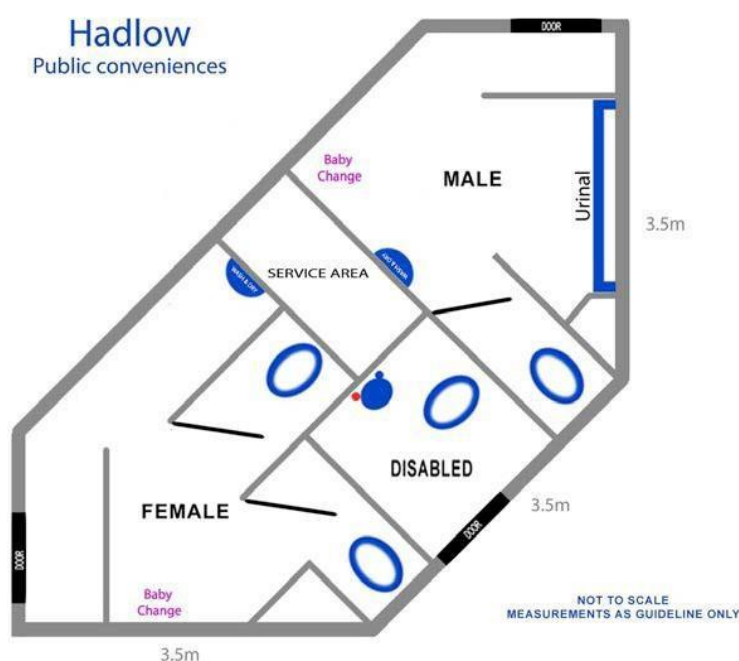



Hadlow Public Toilets



Location: Court Lane junction with A26 Hadlow
Disabled Access: Access via Radar Key
Baby Changing: Facilities available



Male Toilets



Disabled toilet



Female Toilets



Female baby-change shelf



Signage on male toilets

West Malling,


King Street.



Female Facilities	Two toilets, one hand-wash/soap/dry unit.	Red tile floor with stainless steel walls and fittings
Male Facilities	One toilet, one urinal trough, one handwash/soap/dry unit.	Red tile floor with stainless steel walls and fittings
Disabled Facilities	Yes, one unisex toilet with one hand-wash/soap/dry unit.	RADAR system key. Red tile floor with stainless steel walls and fittings
Size of Building	8 metres wide, 4.8 metres deep.	
Building Materials	Brick built exterior, corrugated tiled roof	
Entrances, Doors Windows	Three stainless steel doors. Wheelchair access to all facilities. Windows sealed off	Disabled RADAR key M & F doors locked open
Exterior condition	Exterior in poor overall condition, pitted brickwork, missing bricks, bent railings, moss covered roof. Exterior lights lit during the day.	

Signage	Small green signs on the walls next to the doors.	Signs on High St for King Street Toilets
Opening times	24 HR	Doors are locked open except disabled toilet which has RADAR key entry
Next nearest PC	Manor Park Country Park	M,F & D facilities. 15 min on Foot. Open 7am -8 pm approx
Nearest parking	On High street 20m - fee	
Interior condition Female	Fluorescent Light panels dirty. Hand-wash, Soap and air-dry working. Generally clean, No baby-change, mirror just useable. No Odour.	
Interior condition Male	Fluorescent Light panels dirty, generally 'dim and grim'. Hand-wash, Soap and air-dry working. Strong odour, floor dirty, tiles damaged near urinal. No baby-change. Generally not very pleasant.	
Interior condition Disabled	Clean, no odour, some signage damaged. Hand-wash, Soap and air-dry working. Lighting dim. But clean and odour free, mirror unscratched.	
Drug paraphernalia?	No	
Lights working?	Yes, but dirty panels and quite dim	
Baby change?	None	
Hand-wash	Yes	
Odour	Yes in male only	
Mirrors	Stainless steel, useable in F & D	
Graffiti?	No	
Locks working?	Yes	
Cleaning	Once daily	

West Malling
Public Conveniences

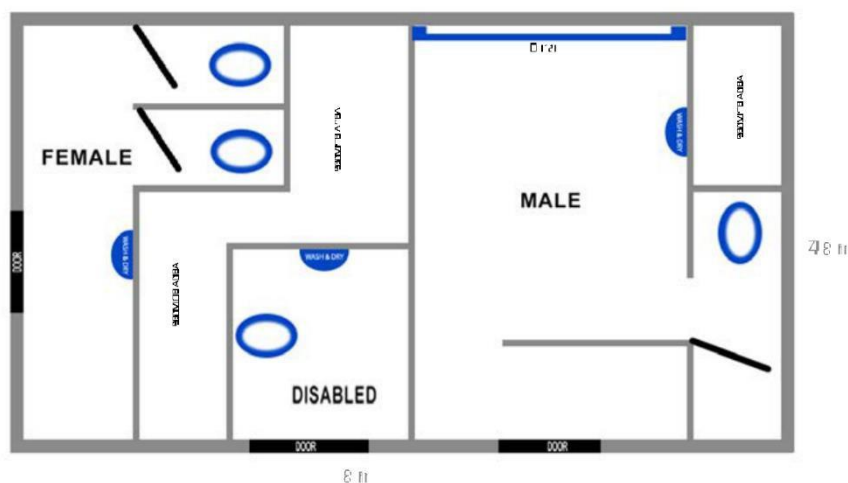


NOT TO SCALE
MEASUREMENTS AS GUIDELINE ONLY

Potential alternative toilet facilities	
Costa Coffee, High Street	1 minute on foot. M/F/with disabled facilities, all in one. But access down two steps. 6.30am-7pm Mon-Sat, 7am-6.30pm Sunday
Five Pointed Star, High Street	1 minute on foot. M/F/with disabled facilities. Access through Bar area. 10.00am-11pm Mon-Sun.
The Bull Inn, Town Hill	4minute on foot. M/F/with disabled facilities. Side access 12.00am-11pm Mon-Sun.(not confirmed)
Franks Restaurant and Mussel Bar, Town Hill	2 minute on foot. M/F/with disabled facilities. Access through dining area 11.30am-10.30pm Mon-Sun.
Joiners Arms, High Street	1 minute on foot. M/F/with disabled facilities. Access through Bar area. 10.00am-11pm Mon-Sun.
St Mary the Virgin, High Street	Doors closed although sign claims that it's open all day for worship.
Manor Park Country Park	M,F & D facilities. 15 min on Foot. Open 7am -8 pm approx
Pad Thai Restaurant	Restricted opening times, not checked in detail
Imperial Dynasty Restaurant	Restricted opening times, not checked in detail
The Farmhouse Gastro Pub	Restricted opening times, not checked in detail



West Malling Public Toilets

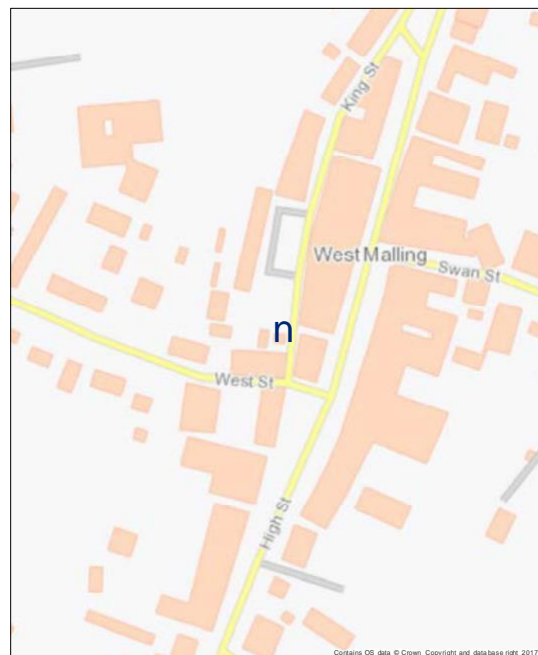

Location: King Street off High Street West Malling
Disabled Access: Access via Radar Key
Baby Changing: No facilities available



Male Toilets



Male Toilets



Female Toilets



Female Toilets



Disabled toilet



Signs on High Street


Leybourne Country Park

Leybourne Country Park car park, Larkfield.



Female Facilities	Three toilets, two hand-wash/soap/dry units, baby-change shelf, one water fountain.	Cream tile floor with stainless steel fittings and white tiled walls.
Male Facilities	One toilet, one urinal trough, two hand-wash/soap/dry units, baby-change shelf, one water fountain.	Cream tile floor with stainless steel fittings and white tiled walls.
Disabled Facilities	Yes, one unisex toilet with one hand-wash/soap/dry unit, one water fountain.	RADAR system key. Cream tile floor with stainless steel fittings and white tiled walls.
Size of Building	Toilet area 7 metres wide, 6.5 metres deep.	Forming part of the Park Rangers office and stores
Building Materials	Brick built exterior, tiled roof	
Entrances, Doors Windows	Three stainless steel doors. Wheelchair access to all facilities. One stainless steel service door.	Disabled RADAR key M & F doors locked open
Exterior condition	Brick exterior in good condition, some moss on roof.	
Signage	Good signage on exterior wall in keeping with the Country Park environment	

Opening times	8am – 8 pm (earlier closing in winter months?)	Doors are unlocked but closed except disabled toiled which has RADAR key entry
Next nearest PC	Snodland	M,F & D facilities. 7 min Drive.
Nearest parking	5 metres - Car park – pay and display	
Interior condition Female	Clean, bright, no vandalism, no odour, roof light panels have some debris, but overall very pleasant facility.	
Interior condition Male	Bright, well lit from windows along side wall. no vandalism, some odour, floor quite dirty, but overall very pleasant facility.	
Interior condition Disabled	Clean, no odour. Hand-wash, Soap and air-dry working. Floor quite dirty.	
Drug paraphernalia?	No	
Lights working?	Yes,	
Baby change?	Yes	
Hand-wash	Yes	
Odour	No	
Mirrors	Stainless steel	
Graffiti?	No	
Locks working?	Yes	
Cleaning	Once daily	

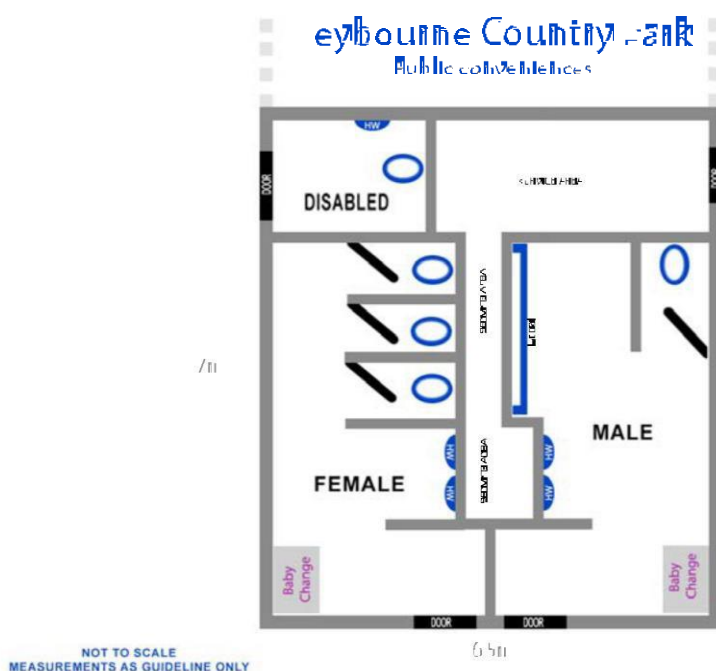



Leybourne Country Park Toilets



Location: Leybourne Country Park Larkfield
Disabled Access: Access via Radar Key
Baby Changing: Facilities available



Male Toilets



Male Toilets



Female Toilets



Female Toilets



Disabled toilet



Female Toilets

Larkfield


Martin Square



Female Facilities	Two toilets, one hand-wash/soap/dry unit, small triangular baby-change shelf.	Red tile floor with stainless steel walls and fittings
Male Facilities	One toilet, one urinal trough, one handwash/soap/dry unit, small triangular baby-change shelf.	Red tile floor with stainless steel walls and fittings
Disabled Facilities	Yes, one unisex toilet with one hand-wash/soap/dry unit.	RADAR system key. Red tile floor with stainless steel walls and fittings
Size of Building	8.4 metres wide, 3.6 metres deep.	
Building Materials	Brick, red tile roof. Stainless steel doors to Male, Female & Disabled toilets.	
Entrances, Doors Windows	Three stainless steel doors. Wheelchair access to all facilities. One stainless steel service door.	Disabled RADAR key M & F doors locked open
Exterior condition	Good overall condition. Disabled door badly dented (vandalised)	

Signage	Lit signs above toilet doors have been defaced and vandalised. One sign on road adjacent to Martin Square	
Opening times	24 HR	Doors are unlocked but closed except disabled toilet which has RADAR key entry
Next nearest PC	Leybourne CP	M,F & D facilities. 15 min Drive.
Nearest parking	10 metres -Martin Square - free	
Interior condition Female	Handwash/Soap/Dry working. Mirror scratched, unuseable. Locks all working. Light panes dirty. Toilet seat pads different colours, one white one black as in many other borough toilets giving a 'patched up at minimal expense' look to repairs. Wall panels very scratched from graffiti removal.	
Interior condition Male	Strong odour, floor very dirty and stained around urinal which was also very stained. Handwash /Dry working, soap not. Mirror scratched and not of any use. Ceiling light panels very dirty and covered in debris. Generally very unpleasant facility.	
Interior condition Disabled	A bit grubby, the walls looked like they had been half cleaned and not finished. Light panels dirty.	
Not used much during visit.		
Drug paraphernalia?	No	
Lights working?	Yes, but dirty panels	
Baby change?	Yes	
Hand-wash	Yes part working	
Odour	Yes, strong in Male toilet	
Mirrors	Stainless steel, not useable in F & M	
Graffiti?	No	
Locks working?	Yes	
Cleaning	Once daily	


airfield
Public Conveniences

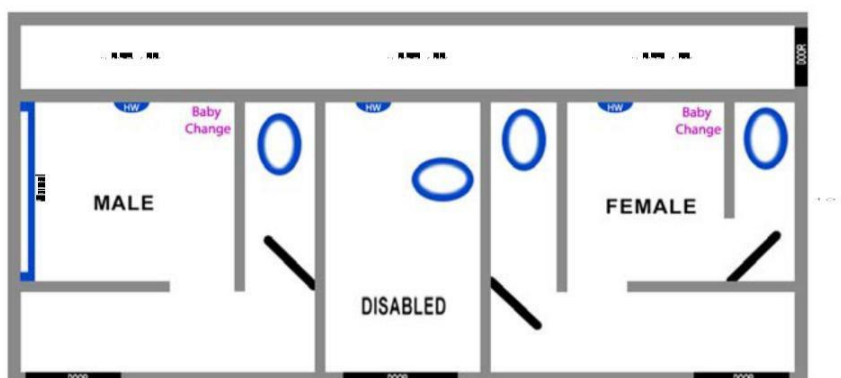

NOT TO SCALE
MEASUREMENTS AS GUIDELINE ONLY



Larkfield Public Toilets

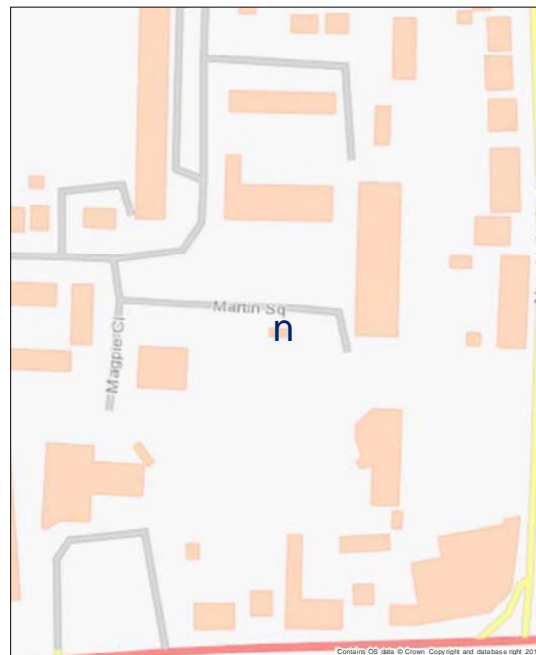

Location: Martin Square Larkfield
Disabled Access: Access via Radar Key
Baby Changing: Facilities available



Male Toilets



Male Toilets



Female Toilets



Damaged Sign - Female Toilets



Disabled toilet



Signs to Larkfield Toilets

Snodland

Car Park off Rocfort Road.




Female Facilities	Two toilets, one hand-wash/soap/dry unit, small baby-change shelf.	Red tile floor with stainless steel walls and fittings
Male Facilities	One toilet, one urinal trough, one handwash/soap/dry unit, small baby-change shelf.	Red tile floor with stainless steel walls and fittings
Disabled Facilities	Yes, one unisex toilet with one hand-wash/soap/dry unit, small baby-change shelf.	RADAR system key. Red tile floor with stainless steel walls and fittings
Size of Building	8.2 metres wide, 3.7 metres deep.	
Building Materials	Brick built exterior, tiled roof	
Entrances, Doors Windows	Three stainless steel doors. Wheelchair access to all facilities. One stainless steel service door.	Disabled RADAR key M & F doors locked open
Exterior condition	Brick exterior in reasonable condition, moss covered roof. Some roof tile damage. Male and Female entrance doors vandalised and locks broken.	

Signage	Cracked and distressed looking lit signage above the exterior doors only. No obvious signage in town.	
Opening times	24 HR	Doors are unlocked but closed except disabled toilet which has RADAR key entry
Next nearest PC	Leybourne CP	M,F & D facilities. 7 min Drive.
Nearest parking	5 metres - Car park - free	
Interior condition Female	Fluorescent Light panels dirty. Hand-wash, Soap and air-dry working. Mirror not useable. Some odour. Toilet door locks working	
Interior condition Male	Fluorescent Light panels very dirty and cracked in places, scruffy dented (vandalised) walls. Hand-wash, Soap and air-dry working. Strong odour, floor dirty. Stainless steel wall panels and baby-change shelf scratched and vandalised. Toilet door lock working, toilet has mismatched seat panels as with a few other toilets in the borough; It looks as if the originals were black and replacements white, but only the damaged ones get replaced. The urinal trough flush seems to be only working in the middle which leaves the two walls either side unflushed which might explain the strong odour. Generally not very pleasant. The floor was also quite dirty and the drain partially blocked. The cleaner did turn up during the survey and in the 4 minutes they were on site only the rubbish was cleared away, the male toilet floor was not cleaned.	
Interior condition Disabled	Clean, no odour. Hand-wash, Soap and air-dry working. Some Debris on light ceiling panels. Clean and odour free, mirror unscratched. The Disabled toilet facility looks almost unused!	
Drug paraphernalia?	No	
Lights working?	Yes, but dirty panels	
Baby change?	Yes	
Hand-wash	Yes	
Odour	Yes, in both M & F but not in D	
Mirrors	Stainless steel, not useable in F & M	
Graffiti?	No	
Locks working?	Yes	
Cleaning	Once daily	

Potential alternative toilet facilities	
Pavilion Café, Snodland Cricket Meadow	1 minute on foot. M/F/with disabled access, all in one. 9am-3.00pm Mon-Sat, Sunday - closed
Zeldas Café, Malling Road	3 minutes on foot. One unisex with disabled facilities. Access through main café area, although there is a rear entrance. 7.30 am-4.00pm Mon-Sat, Sunday - closed
Shell garage, Malling Road	5 minute drive. M/F/D. assumed open 24hr (not confirmed)
New Co-op store being built in town on corner of High St and Holborough Road. Opening Autumn 2018, but no confirmation of customer toilets being provided yet.	

Snodland
Public Conveniences

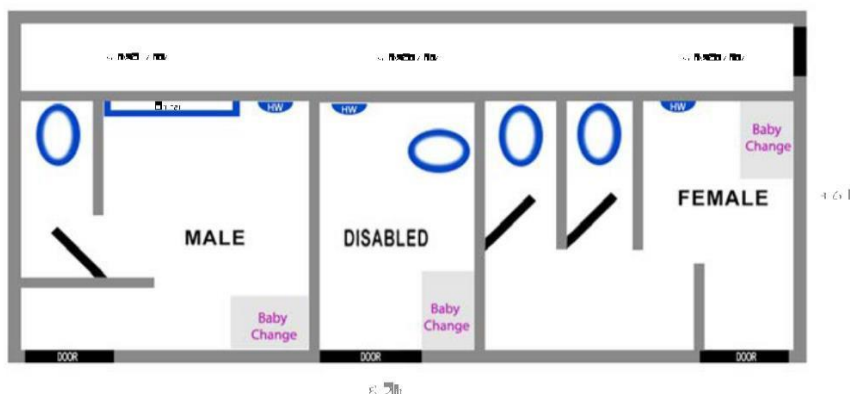

NOT TO SCALE
MEASUREMENTS AS GUIDELINE ONLY



Snodland Public Toilets



Location: Rocfort Road car park Snodland
Disabled Access: Access via Radar Key
Baby Changing: Facilities available



Male Toilets



Male Toilets



Female Toilets



Female Toilets





Disabled toilet

Damage on roof


East Peckham

The Pound, Snoll Hatch Road




Female Facilities	Two toilets, one hand-wash/soap/dry unit, small triangular baby-change shelf.	Cream tile floor with stainless steel walls and fittings
Male Facilities	One toilet, one urinal trough, one handwash/soap/dry unit, small triangular baby-change shelf.	Cream tile floor with stainless steel walls and fittings
Disabled Facilities	Yes, one unisex toilet with one hand-wash/soap/dry unit.	RADAR system key. Cream tile floor with stainless steel walls and fittings
Size of Building	8.3 metres wide, 5.5 metres deep.	
Building Materials	Brick, Breeze block and UPVC cladding, composite tile roof. Stainless steel doors to Male, Female & Disabled toilets. Iron gates to exterior walkway into Male & Female toilets.	
Entrances, Doors Windows	Three stainless steel doors. Wheelchair access to all facilities. One stainless steel service door.	Disabled RADAR key M & F doors locked open
Exterior condition	Brick exterior in reasonable condition, moss covered roof. Front of roof and cladding below recently repaired and in as new condition.	

Signage	Green signs above the exterior doors only. No obvious signage in village.	
Opening times	24 HR	Doors are unlocked but closed except disabled toilet which has RADAR key entry
Next nearest PC	West Malling	M,F & D facilities. 7 min Drive.
Nearest parking	5 metres – on street - free	
Interior condition Female	No odour. Ceiling light panels very dirty and covered in debris. Handwash/Soap/Dry unit not working at all, mirror scratched. Centre drain on floor very dirty.	
Interior condition Male	Some odour Ceiling light panels very dirty and covered in debris. Handwash/Soap/Dry unit not working at all, mirror scratched and not of any use. Floor very dirty and badly stained by urinal trough. Mould on ceiling.	
Interior condition Disabled	Clean, no odour. Hand-wash, Soap and air-dry working. Some Debris on light ceiling panels. Clean and odour free, mirror unscratched.	
All facilities quite dimly lit. It was noted that there was no usage at all during 90 min survey 10.30 am (Tuesday)		
Drug paraphernalia?	No	
Lights working?	Yes, but dirty panels	
Baby change?	Yes, not in Disabled toilet.	
Hand-wash	Yes only working in Disabled toilet.	
Odour	Yes, in Male toilet	
Mirrors	Stainless steel, not useable in F & M	
Graffiti?	No	
Locks working?	Yes	
Cleaning	Once daily	

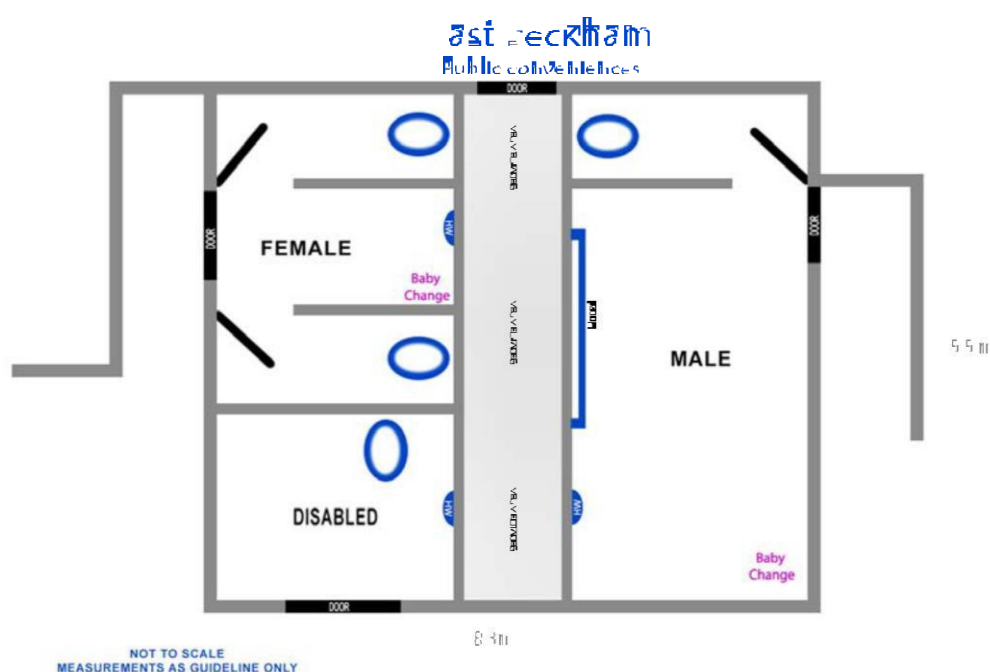



East Peckham Public Toilets

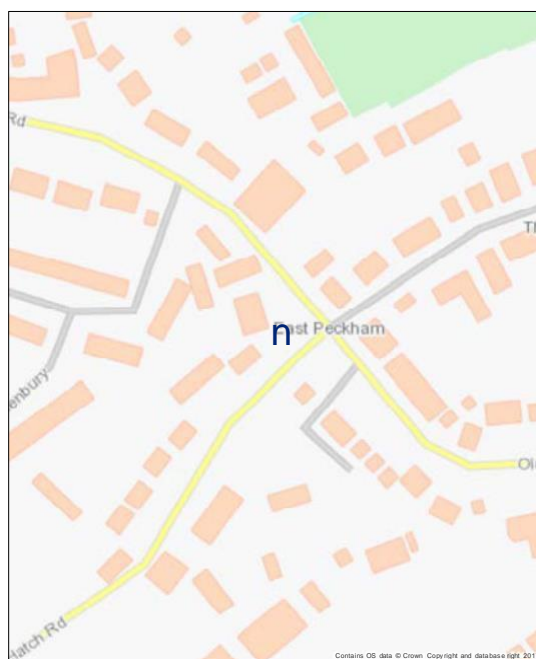

Location: The Pound Snoll Hatch Road East Peckham
Disabled Access: Access via Radar Key
Baby Changing: No facilities available



Male Toilets



Male Toilets



Female Toilets



Female Toilets



Disabled toilet



Mould on ceiling - Male toilet


Aylesford

Vicarage Close



Female Facilities	Two toilets, one disabled two hand-wash/soap/dry units, one in the disabled toilet, one outside with the baby-change shelf.	White tile walls and cream floor, stainless steel fittings
Male Facilities	One toilet, one urinal trough, one hand-wash/soap/dry unit, small triangular baby-change shelf.	White tile walls and cream floor, stainless steel fittings
Disabled Facilities	In Male and Female toilets.	
Size of Building	6.7 metres wide, 7.0 metres deep.	
Building Materials	Yellow Brick, red tile roof. Building incorporates an 1868 commemorative water fountain alcove (William Ladd Betts of Preston Hall).	
Entrances, Doors Windows	Windows to side of Male and Female Toilets	Stainless steel doors to Male & Female toilets
Exterior condition	Good overall condition. Well maintained with no sign of any vandalism or graffiti.	
Signage	Minimal on outside of building	

Opening times	24 HR	Doors locked open
Next nearest PC	Leybourne CP	M,F & D facilities. 15 min Drive.
Nearest parking	10 metres - free	
Interior condition Female	Hand-wash; water just working, no soap. Mirror scratched. Locks all working. Ceiling paint peeling and cracked	
Interior condition Male	Hand-wash not working, only soap. Floor tiles stained by urinal	
Interior condition Disabled	Well lit, Male toilet a bit grubby and hand-wash only soap. Female toilet Hand-wash all working, bright and quite clean.	
Quite well used during survey visit, and busy at school finish time		
Drug paraphernalia?	No	
Lights working?	Yes,	
Baby change?	Yes	
Hand-wash	Only one of four	
Odour	No	
Mirrors	Yes	
Graffiti?	No	
Locks working?	Yes	
Cleaning	Once daily	

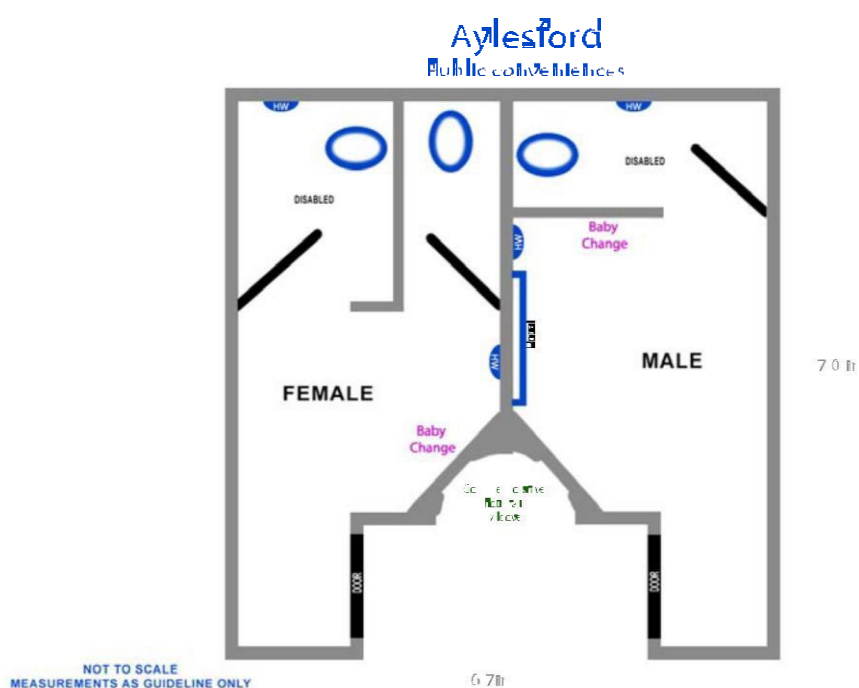



Aylesford Public Toilets



Location: Vicarage Close Aylesford
Disabled Access: No separate facility
Baby Changing: No facilities available



Female Toilets



Female toilet entrance



Male Toilets



Male Toilets



Commemorative Fountain



Aylesford Toilet Block

Borough Green


Village Hall Car park.



Female Facilities	Two toilets, one hand-wash/soap/dry unit.	Red tile floor with stainless steel walls and fittings
Male Facilities	One toilet, one urinal trough, one handwash/soap/dry unit.	Red tile floor with stainless steel walls and fittings
Disabled Facilities	Yes, one unisex toilet with one hand-wash/soap/dry unit.	RADAR system key. Red tile floor with stainless steel walls and fittings
Size of Building	8.1 metres wide, 4.6 metres deep.	
Building Materials	Brick built exterior, corrugated tiled roof	
Entrances, Doors Windows	Three stainless steel doors. Wheelchair access to all facilities. Windows sealed off	Disabled RADAR key M & F doors locked open
Exterior condition	Exterior in reasonable condition, bent railings, moss covered roof on north side. Exterior lights lit during the day.	

Signage	Small green signs on the walls next to the doors.	Signs on High St and A25 Maidstone Road
Opening times	24 HR	Doors are locked open except disabled toilet which has RADAR key entry
Next nearest PC	Wrotham	M,F & D facilities. 15 min Drive.
Nearest parking	5 metres - Village Hall Car park - free	
Interior condition Female	Fluorescent Light panels dirty. Hand-wash, Soap and air-dry working. Generally clean, No baby-change, mirror not useable. Some odour	
Interior condition Male	Fluorescent Light panels dirty, scruffy dented (vandalised) walls. Hand-wash, Soap and air-dry working. Some odour, floor dirty, tiles damaged near urinal. No baby-change. Generally not very pleasant.	
Interior condition Disabled	Clean, no odour. Hand-wash, Soap and air-dry working. Lighting dim. Clean and odour free, mirror unscratched.	
Drug paraphernalia?	No	
Lights working?	Yes, but dirty panels	
Baby change?	None	
Hand-wash	Yes	
Odour	Yes, slight in both M & F but not in D	
Mirrors	Stainless steel, not useable in F & M	
Graffiti?	No	
Locks working?	Yes	
Cleaning	Once daily	


Borough Green
Public Conveniences

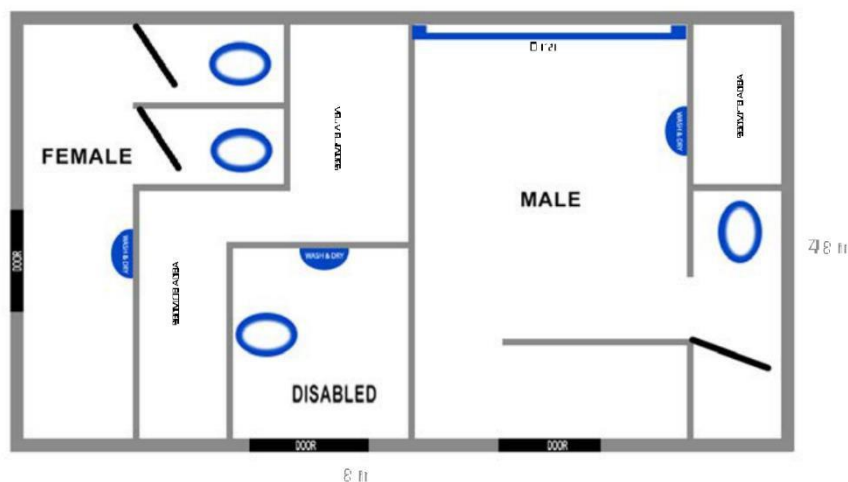

NOT TO SCALE
MEASUREMENTS AS GUIDELINE ONLY



Borough Green Public Toilets

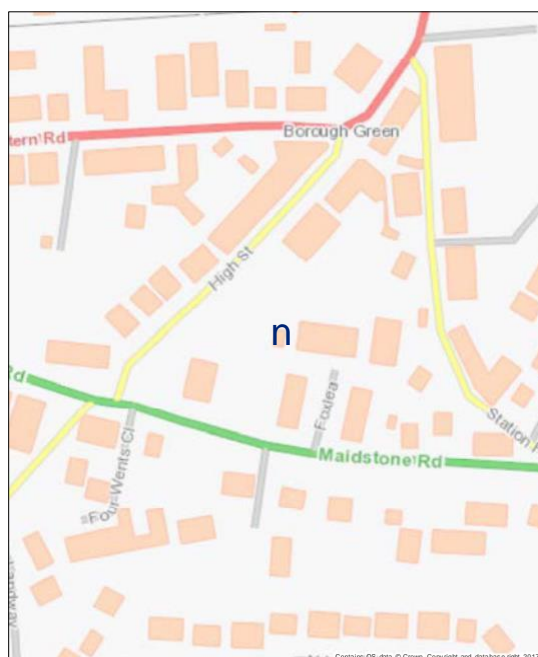

Location: Village Hall Car Park Borough Green
Disabled Access: Access via Radar Key
Baby Changing: No facilities available



Male Toilets



Male Toilets



Female Toilets



Female Toilets



Disabled toilet



Signs on A25 Maidstone Road